

PORTABLE HEAT SEALERS

Poly Sealer & Direct Heat Sealer

These portable, lightweight & versatile sealers can be used anywhere. They are ideal for sealing small, irregular, or extra long packages. The sealer is heavy duty with a high impact, ABS thermal plastic casting. A 5-15 minute warm-up time is needed in order for these sealers to achieve the correct temperature.

KF-150PS




KF-150PS is a poly heat sealer. It makes a perfect strong 6" long and 1/18" wide seal on poly bags and other thermoplastic materials. The upper jaw holds the metal sealing bar with a 275°F sealing temperature and is covered with a Teflon cloth. The bottom jaw holds the resilient silicon rubber. This sealer seals polyethylene or polypropylene up to 6 mil thick.

Specifications

Power	110V	Seal Length	6"
Watts	25 watts	Seal Width	1/18"
Weight	17 oz.	Power Cord	7ft.
Dimensions (L x W x H)	6 1/2" x 7" x 3 1/4"	Mfg. Kit	1 Teflon sheet (5 3/4" x 2 1/2")

KF-150CST

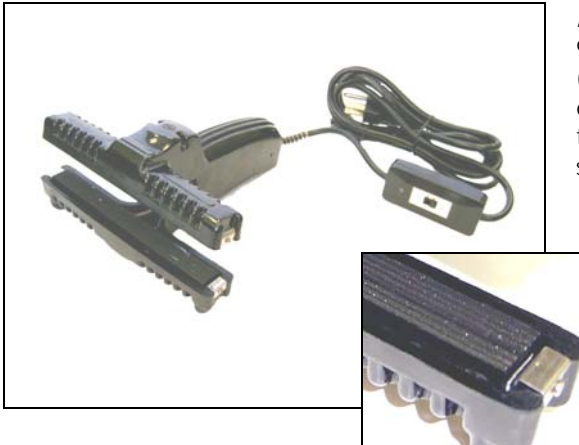

KF-150CST is a direct heat sealer equipped with 2 heated 9/16" (15mm) wide and 6" long Teflon coated, serrated (horizontal line seal imprint) jaws. It is ideal for sealing cellophane, coated aluminum foil, Kraft paper, and other thick materials. The temperature switch has 2 temperature settings, 350 & 450 ° F. It can be used as a heat sealer.

Specifications

Power	110V-120V	Seal Length	6"
Watts	50w	Seal Width	5/8"
Weight	22oz.	Power Cord	7ft.
Dimensions (L x W x H)	6 1/2" x 7" x 3 1/4"	2 Temperature Settings	350°F & 450°F
Seal Bar	serrated		



Now available. KF-CSTA. This model comes with an adjustable temperature controller giving the user a much wider range of temperature settings enabling greater variety of material to be sealed.

PC Set, Pedal & Clamp Set

The KF-150 series can be used by hand, on a table, or by foot pedal. The pedal and clamp set is an optional accessory item, which can be purchased individually. The sealer can be clamped to any table with a lip to hold the clamps. The sealing operation can be done using the foot pedal. No special stand or screws for mounting are necessary.

